

ALU SCAFFOLDING WALA PVT LTD

Corporate Office: 0, Deha colony, Shiv Mandir, Sec-89 Faridabad

121001, Haryana

Manufacturing Unit: Kh 18/2, Laxmi Vihar, Colony Nangli Sakarwati

Najafgarh, Delhi, 110043

Contact:+91 9716703108, +91 8252040540 Email:

GSTIN: 07ABCCA2422Q1ZL



OVERVIEW

Poddar and Vaau Venture is a manufacturer of aluminium scaffolding. We are providing aluminium scaffolding on rental and sales basis to services, catering to construction, maintenance, and renovation projects across various industries. With a commitment to safety, reliability, and efficiency, we deliver tailored scaffolding solutions to meet the unique needs of each project, ensuring smooth execution and timely completion.

Mission Statement

Our mission is to provide innovative and reliable scaffolding solutions that enhance safety, efficiency, and productivity on every project we undertake. We are dedicated to exceeding customer expectations while prioritizing the well-being of our employees and the communities we serve.

SCAFFOLDING SALES & RENTAL SCAFFOLDING DESIGN AND ENGINEERING INSTALLATION AND DISMANTLING SCAFFOLDING INSPECTION AND AND MAINTENANCE

SERVICES



KEY DIFFERENTIATORS

Safety First Approach

We prioritize safety above all else, implementing rigorous safety measures and protocols to protect workers and prevent accidents.

Quality Assurance

Our scaffolding systems undergo thorough quality checks to ensure they meet industry standards and exceed customer expectations.

Customized Solutions

We understand that every project is unique, and we tailor our scaffolding solutions to address the specific requirements and challenges of each client.

Experienced Team

Our team consists of seasoned professionals with extensive experience in the scaffolding industry, capable of delivering exceptional results on projects of any scale or complexity.



Stairway Scaffolding (1300 mm x 1800 mm)

Stairway scaffolding, also known as stair tower scaffolding, is a type of scaffolding specifically designed to provide safe access to elevated areas where traditional ladders or straight scaffolding may not be suitable. It is commonly used in construction, renovation, maintenance, and other activities where workers need to access multiple levels of a structure.





Standard Feature

Stairs Platform Landings

Handrails and Guardrails

Modularity

Safety Features

Accessibility

| Model No | PVSO32 | PVSO42 | PVS052 | PVS062 | PVS072 | PVS082 | PVS092 | PVS102 |
|---------------------|--------|--------|--------|--------|--------|--------|--------|--------|
| Working Height (m) | 4.2 | 5.2 | 6.2 | 7.2 | 8.2 | 9.2 | 10.2 | 11.2 |
| Tower Height (m) | 3.2 | 4.2 | 5.2 | 6.2 | 7.2 | 8.2 | 9.2 | 10.2 |
| Platform Height (m) | 2.2 | 3.2 | 4.2 | 5.2 | 6.2 | 7.2 | 8.2 | 9.2 |

| Model No | PVS112 | PVS122 | PVS132 | PVS142 | PVS152 | PVS162 | PVS172 | PVS182 |
|-----------------------|--------|--------|--------|--------|--------|--------|--------|--------|
| Working Height (m) | 12.2 | 13.2 | 14.2 | 15.2 | 16.2 | 17.2 | 18.2 | 19.2 |
| Tower Height (m) | 11.2 | 12.2 | 13.2 | 14.2 | 15.2 | 16.2 | 17.2 | 18.2 |
| Platform Height (m) | 10.2 | 11.2 | 12.2 | 13.2 | 14.2 | 15.2 | 16.2 | 17.2 |



Narrow Scaffolding (750 mm x 1800 mm)

Narrow-type scaffolding, often used in confined spaces or areas with limited access, typically includes several standard features to ensure safety and functionality.





Standard Feature

Slim Design Adjustable Height

Non-Slip Surfaces

Mobility

Guardrails

Locking Mechanisms

Compliance with Regulations

| Model No | PVN022 | PVN032 | PVNO42 | PVN052 | PVN062 | PVN072 | PVN082 |
|---------------------|--------|--------|--------|--------|--------|--------|--------|
| Working Height (m) | 3.2 | 4.2 | 5.2 | 6.2 | 7.2 | 8.2 | 9.2 |
| Tower Height (m) | 2.2 | 3.2 | 4.2 | 5.2 | 6.2 | 7.2 | 8.2 |
| Platform Height (m) | 1.2 | 2.2 | 3.2 | 4.2 | 5.2 | 6.2 | 7.2 |


Toeboards

Easy Assembly



Extra Reach Scaffolding (1350 mm x 1800 mm)

Single width scaffolding, also known as single scaffolding or bricklayer's scaffolding, is a type of scaffolding commonly used in construction and renovation projects. It consists of a single row of standards (upright poles) which are placed parallel to the wall being worked on. Ledges (horizontal tubes) are then fixed into the standards at regular intervals to provide support for the scaffold boards, creating a working platform for workers to stand on.

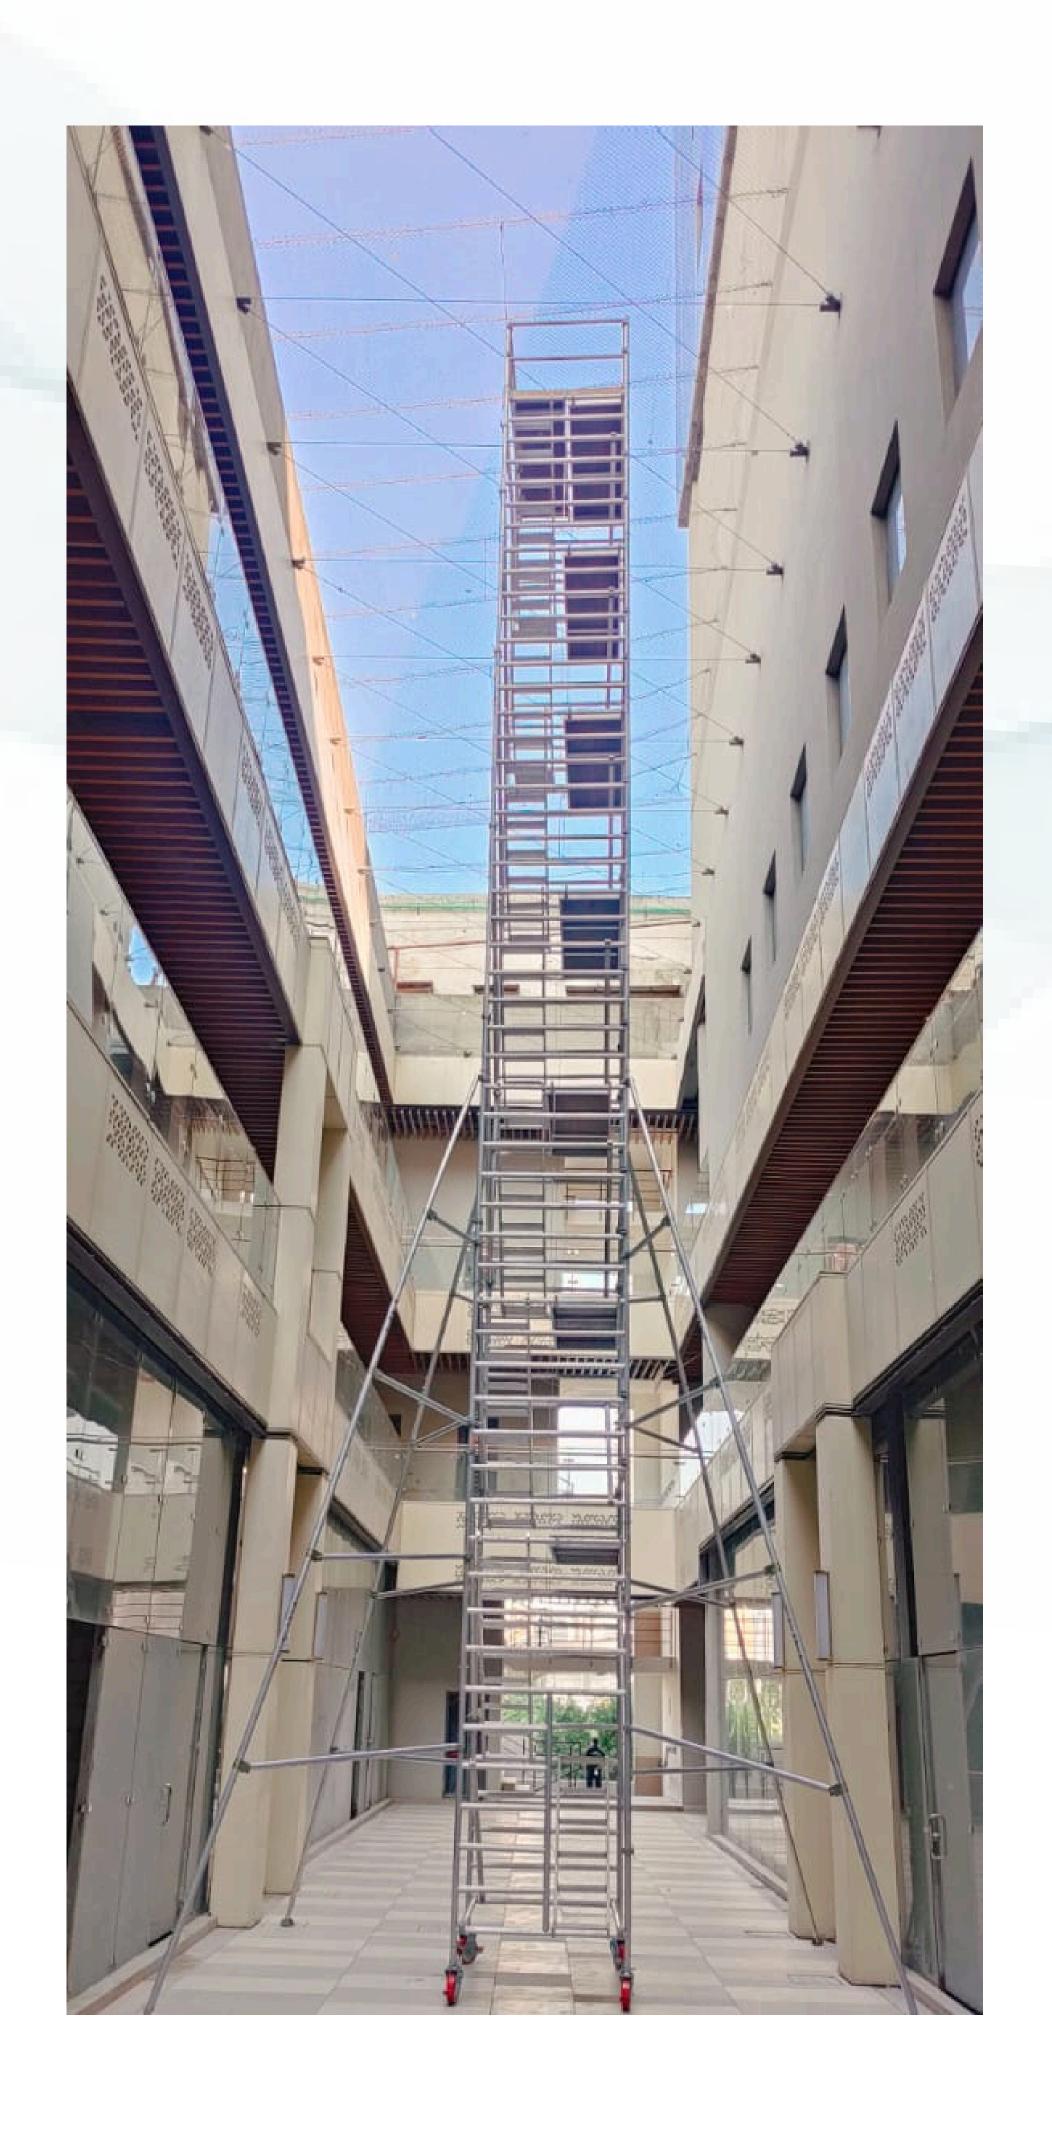

| Model No | PVER192 | PVER202 | PVER212 | PVER222 | PVER232 | PVER242 | PVER252 | PVER262 |
|---------------------|---------|---------|---------|---------|---------|---------|---------|---------|
| Working Height (m) | 20.2 | 21.2 | 22.2 | 23.2 | 24.2 | 25.2 | 26.2 | 27.2 |
| Tower Height (m) | 19.2 | 20.2 | 21.2 | 22.2 | 23.2 | 24.2 | 25.2 | 26.2 |
| Platform Height (m) | 18.2 | 19.2 | 20.2 | 21.2 | 22.2 | 23.2 | 24.2 | 25.2 |

Standard Feature

Height Extension


Versatility

Safety Features

Customization Options

Specialized Applications



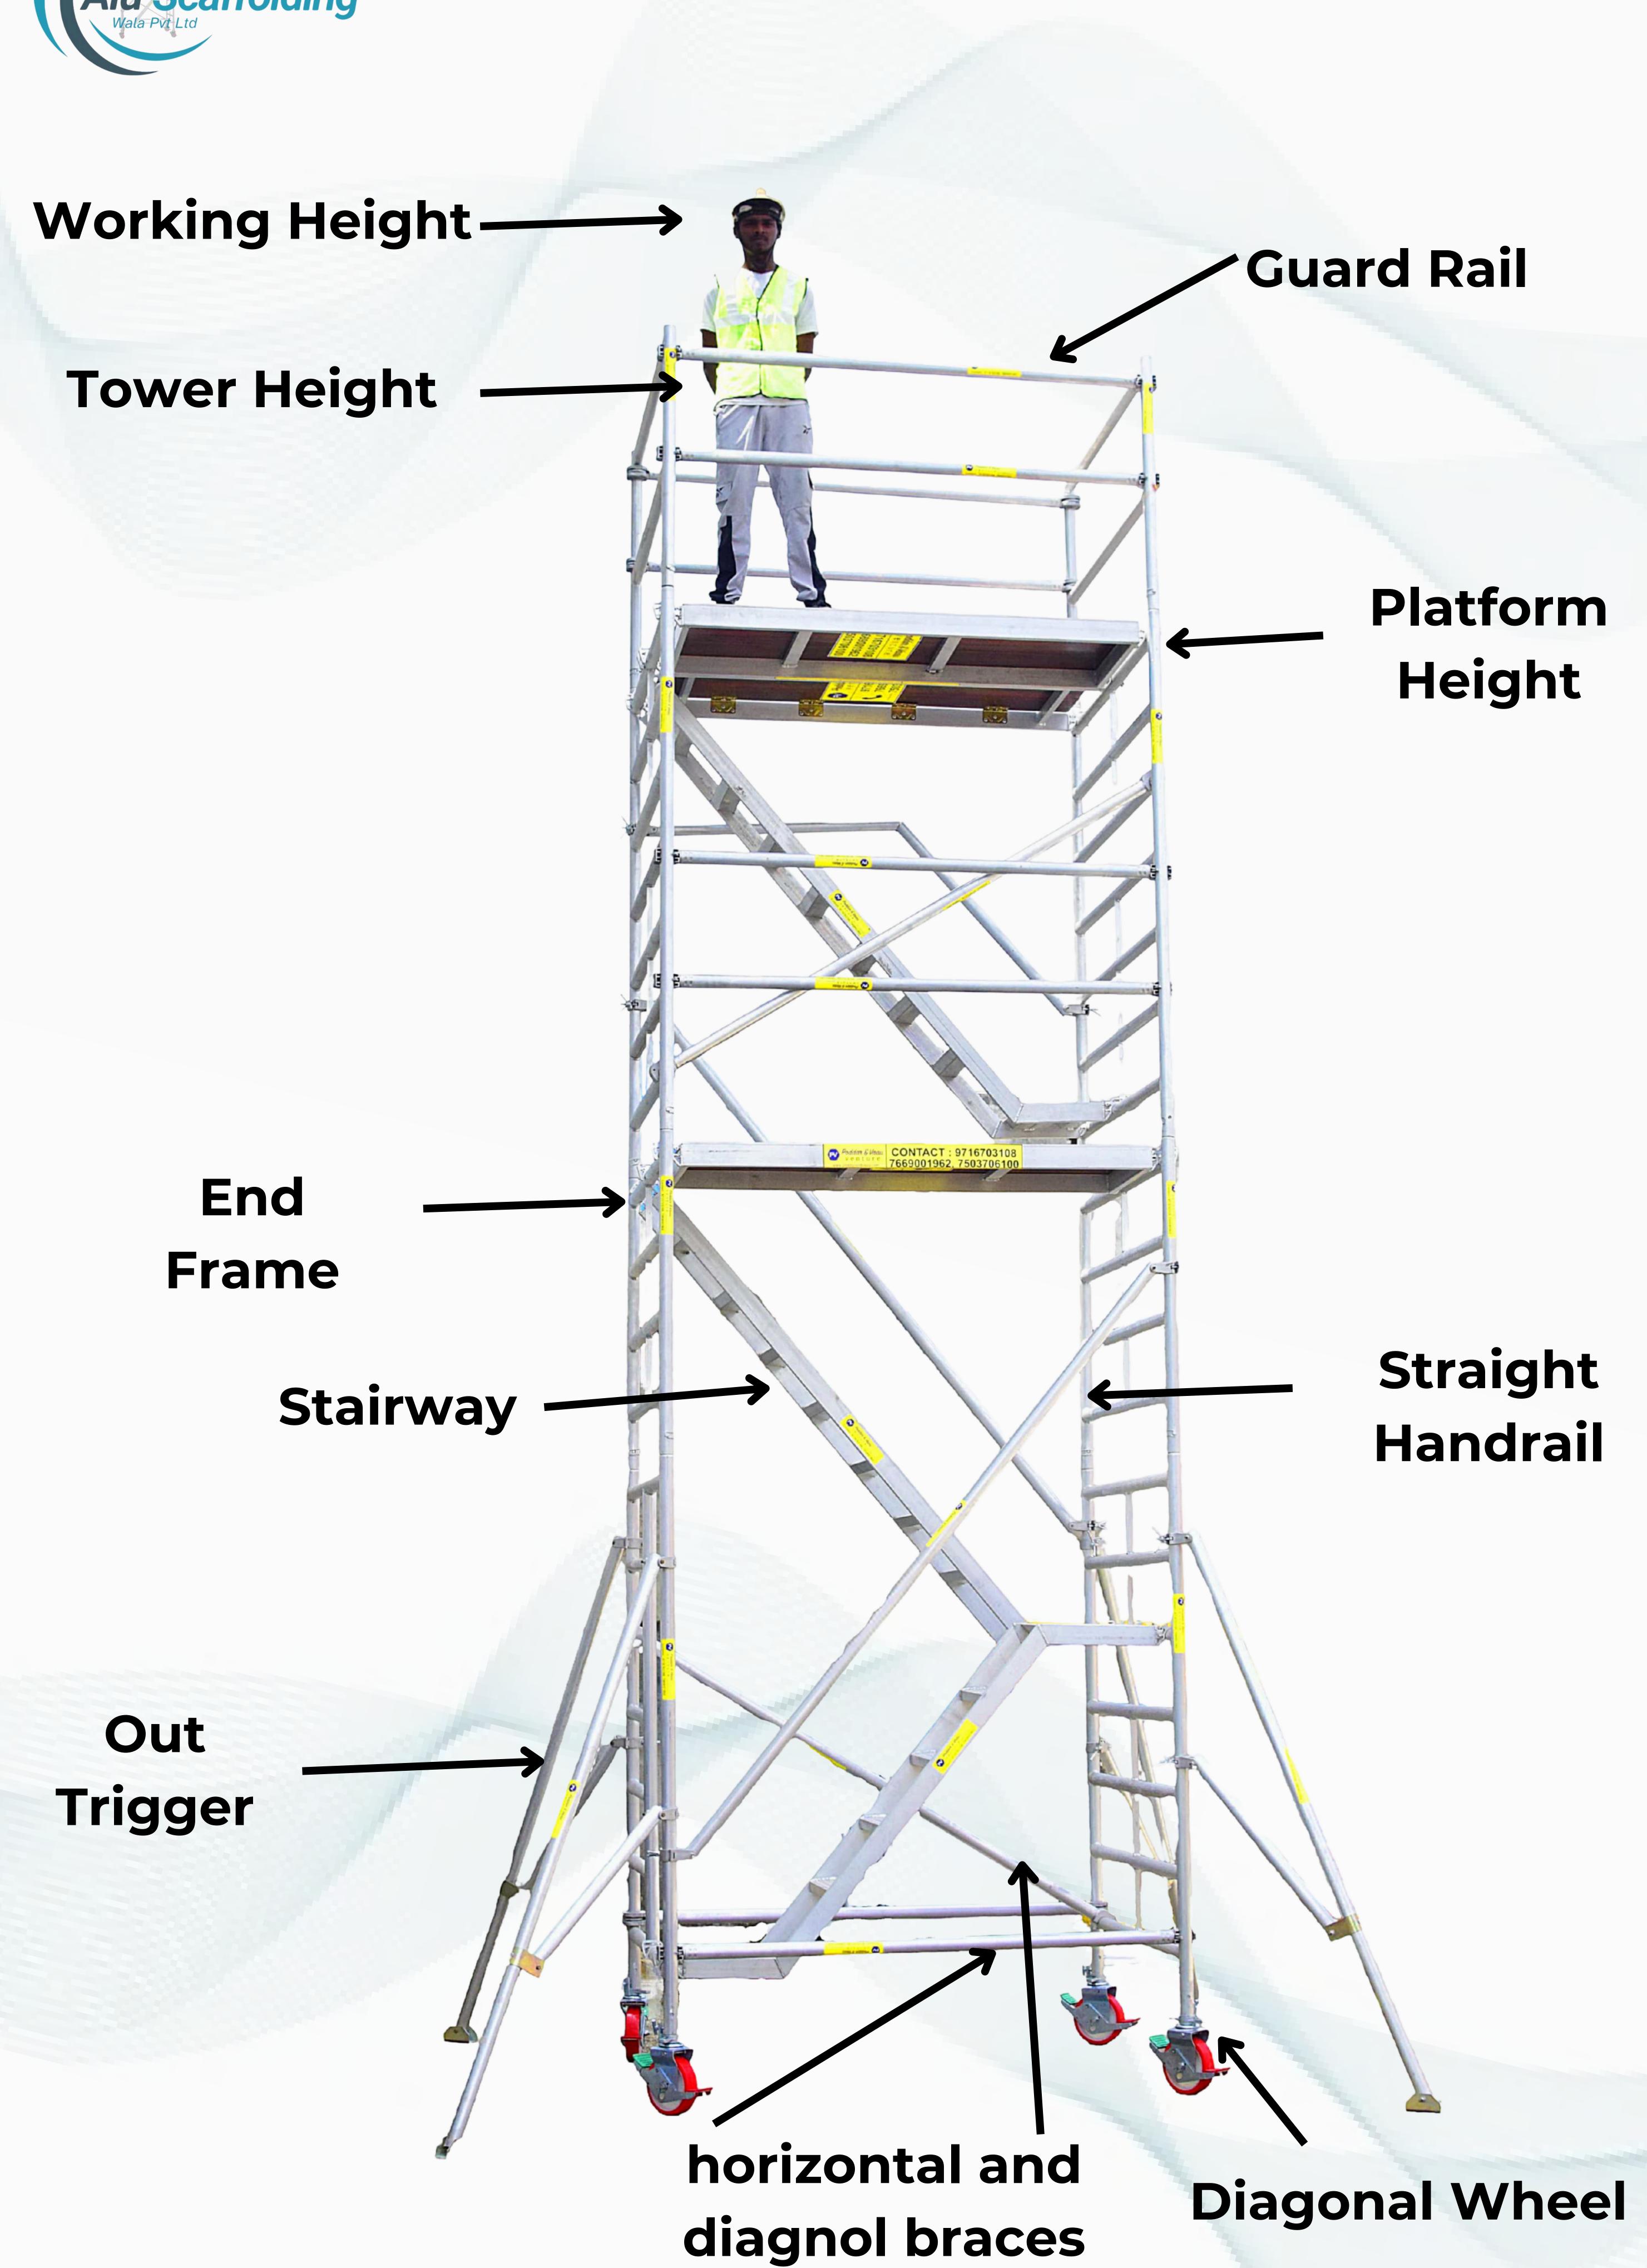



DO YOU NEED CUSTOMIZED SOLUTIONS FOR YOUR NEED?

NO NEED TO WORRY, WE ARE HERE TO HELP YOU OUT.



Contact:+91 9716703108, +91 8252040540